DECK OR HOSE. YOUR CALL.



BOWIE HYDRO-MULCHER® · TRAILER

LANCER 600T

A working platform with a discharge cannon, or a hose from the ground: the Lancer is the smallest Bowie that gives you both. 597 gallons, a Kohler 25 hp EFI, and a clutch each for the agitator and the pump. This one is Bowie Green, 2" Bowie gear pump, with a 200' electric hose reel. Built in Bowie, Texas. Sold and supported by ETR Equipment.

597 GAL
TANK CAPACITY

25 HP
KOHLER EFI GAS

5,450 SQ FT
PER TANK, WOOD FIBER AT 2,000 LB/ACRE

2"
BOWIE GEAR PUMP

ETR Equipment LLC · 716 Caughman Point, Leesville, SC 29070 · (912) 288-9231

ASK ABOUT THIS UNIT

WHAT YOU'RE LOOKING AT.

The photographs on this page show a Bowie Lancer 600, built as this unit is built. This machine is in production at Bowie and has not been photographed. No renders, no stock art.




THE WHOLE MACHINE

Single-axle trailer, working platform with ladder, enclosed engine bay and the tower at the rear.




PADDLE AGITATION

A driven paddle shaft inside the tank keeps a heavy slurry moving instead of settling out.

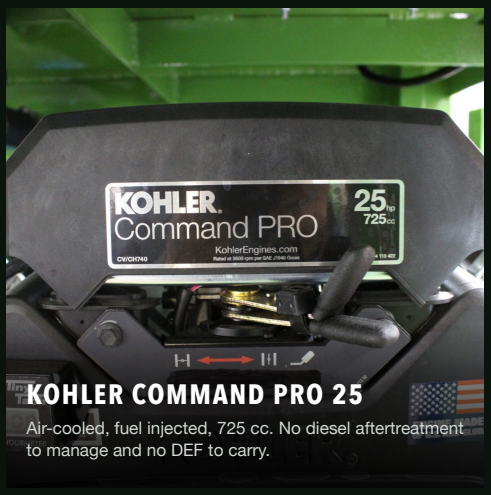

KOHLER COMMAND PRO 25

Air-cooled, fuel injected, 725 cc. No diesel aftertreatment to manage and no DEF to carry.

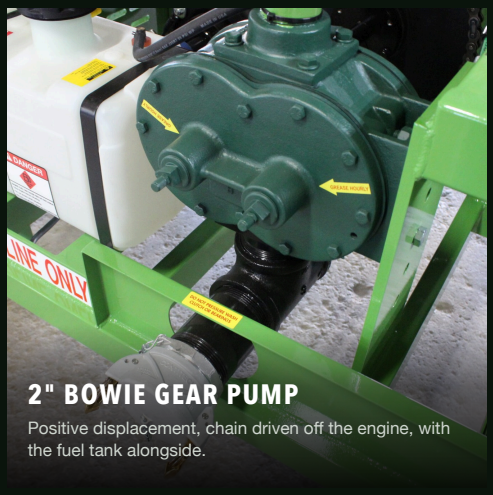

2" BOWIE GEAR PUMP

Positive displacement, chain driven off the engine, with the fuel tank alongside.



DISCHARGE PLUMBING

Hard-piped discharge with a lever valve and cam-lock, straight through from the pump.

THIS UNIT · **AS IT IS BUILT**



TRAILER

Single-axle trailer with a 2-5/16" ball coupler and drop-leg jack. Tows behind a three-quarter-ton.

15'-11" · 6'-5" WIDE · 3,500 LBS EMPTY



TOWER AND CONTROLS

The discharge tower on its post, with the control box at the operator's station.

FROM THE PLATFORM



WITH THE HOSE REEL

The optional powered reel mounted above the tank, for the ground the tower cannot reach.

OPTIONAL



YOU BUY THE MACHINE. YOU GET THE COMPANY.

Bowie builds it. ETR Equipment stands behind it: startup, training, parts, and a phone that gets answered after the check clears. Our reps sell hydro-seeding for a living; we'll help you win the work, not just spec the iron.

STARTUP WITH YOUR PURCHASE

Loading, mixing, spraying, and cleanout on day one, at your site, not a demo lot.

MULCH, TAUGHT

Wood, blends, BFM and FGM™: what to load, how many bags per tank, and how to keep it spraying smooth.

AUTHENTIC BOWIE PARTS

Nozzles, gears, hose, and couplers ordered straight from the Bowie factory and shipped to you, so a worn part never parks you.

WE ANSWER THE PHONE

Pump won't prime? Mix won't spray? Call, and we walk you through it mid-job.

WHY BOWIE.

One factory on the same street in Bowie, Texas since day one. Steel cut, welded and plumbed in-house. Heavy tanks, mechanical paddle agitation, and machines that outlive their loans. Factory warranty on every unit.

1953

Started as a pump and machine shop in Bowie, Texas. Still there, still building.

1962

Hydro-Mulcher® registered as Bowie's trademark. The name the industry uses is theirs.

USA BUILT




Designed, welded and assembled in Bowie, Texas. Every tank leaves the factory wearing this flag.



STEEL CUT IN HOUSE


WELDED IN HOUSE

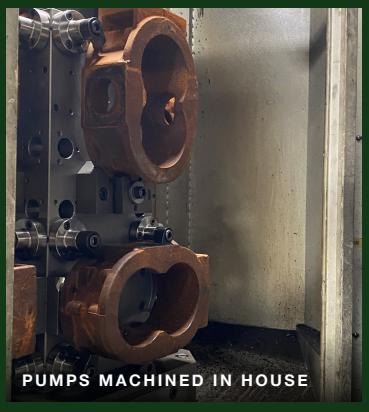
PUMPS MACHINED IN HOUSE


CASTINGS MACHINED IN HOUSE

Photographed at Bowie Industries, Bowie, Texas. The Lancer carries the 2 inch Bowie gear pump shown.

SPECIFICATIONS.

	LANCER 600 · TRAILER
Length	15'-11"
Width	6'-5"
Height	8'-9"
Empty weight	3,500 lbs
Running gear	DOT LED lighting
Hitch	2-5/16" ball
Engine	Kohler 25 hp EFI, air-cooled gas
Liquid capacity	597 US gal (2,260 L)
Pump	2" Bowie gear pump
Agitation	Mechanical paddle agitation
Coverage	5,450 sq ft per tank, virgin wood fiber at 2,000 lb/acre
Paint	Bowie Green



THIS UNIT

MODEL **2026 Bowie Lancer 600T**

STATUS **In production at Bowie, for GA**

Bowie Green, built as listed above.

EQUIPPED ON THIS UNIT.


- Clear-water flush system
- 200' electric hose reel with 200' of 1-1/2" hose
- Steel drive gear with rubber idler, 2" pump
- Discharge cannon from the platform
- Full-size agitator on its own electric clutch
- Four nozzles and quick couplers
- 2-5/16" ball, DOT LED lighting
- Bowie Green, the standard color

WITH EVERY ETR MACHINE: Manuals · Bowie factory warranty · ETR startup & mixing guidance.



THE IN-BETWEEN JOBS.

Too big for a 300, not enough to justify a diesel Victor: subdivisions, commercial pads, pond banks, DOT punch-list work. Two people and a three-quarter-ton.

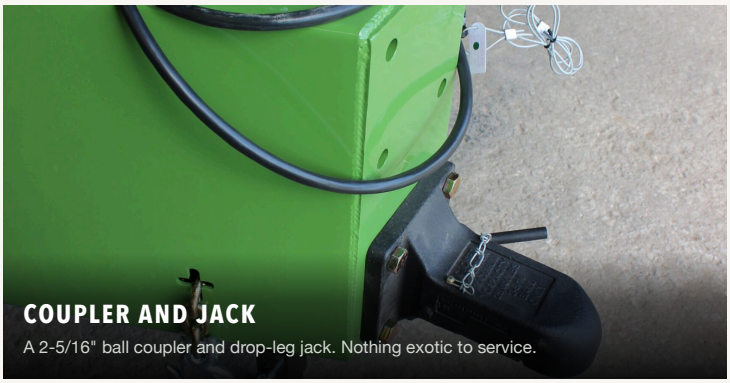

COUPLER AND JACK

A 2-5/16" ball coupler and drop-leg jack. Nothing exotic to service.



ENGINE BAY

Kohler, chain drive and gearbox behind the guard, reachable from both sides.

The photographs on this page show a Bowie Lancer 600, built as this unit is built. This machine is in production at Bowie and has not been photographed. Specifications from Bowie Lancer 600 sheet (2024 revision), subject to change without notice. Coverage is 5,450 sq ft per tank, virgin wood fiber at 2,000 lb/acre, calculated from ETR's loading chart at 50 lb of wood fiber per 100 gallons; a different application rate gives a different figure. Hydro-Mulcher® is a registered trademark of Bowie Industries, Inc. FGM™ is a trademark of PROFILE Products LLC.

ADDITIONAL OPTIONS ON THIS MACHINE.

CLEAR-WATER FLUSH SYSTEM

An integrated auxiliary clean-water tank for flushing the pump and plumbing between tanks and at the end of the day. Functions with 2 deck mounted valve handles that work in unison, closing the main slurry tank and opening the flush tank. Flushes the pump, deck gun, and hose at the job site, the handles return up as soon as flushing is done.

ELECTRIC HOSE REEL WITH 200 FT HOSE

A powered reel supplied with its hose already on the drum and coupled. Suits crews on highway shoulders and detention ponds, where the machine stays parked. Bowie derates loading rate 5 percent for every 50 feet of hose.

STEEL DRIVE GEAR, 2 INCH PUMP

A steel drive gear, with the idler left in standard Buna-N elastomer. The drive gear carries the full input torque, so it wears first. It is not the complete abrasion fix, since fertilizer and grit wear both gears.

WITH EVERY ETR MACHINE: Manuals · Bowie factory warranty · ETR startup & mixing guidance. Options are as ordered for this unit and are fitted at the Bowie factory before delivery. Machines shown in photographs may include other optional equipment.